


- PAINT WALLS (9ft)
- PAINT WALLS (9ft) & CEILING (25ft)
- PAINT WALLS (9ft) & EXPOXY FLOORS

GENERAL NOTES

1. CONTRACTOR TO FOLLOW ALL LOCAL, STATE, OR APPLICABLE PDG CODES & REPORT ANY DISCREPANCY TO ARCHITECT PRIOR TO CONST.
2. ALL INTERIOR NON-BEARING WALLS TO BE 3" MET STUD @ 16" O.C.
3. ALL INTERIOR BEARING WALLS TO BE 6" MET STUD @ 16" O.C. BEARING MET JOISTS @ 16" O.C.
4. NEW EXTERIOR WINDOWS & PRECAST REQUIRES O.P. SIZE ENGINEERING FROM PLANK W/PR. VERIFY W/ARCHITECT
5. NEW EXTERIOR WINDOW & CURT WALL TO BE IN SIM. SIZE TO WINDOWS IN PRECAST. PROVIDE NEW STEEL EDGE C O.P.M.G. VERIFY W/ARCHITECT

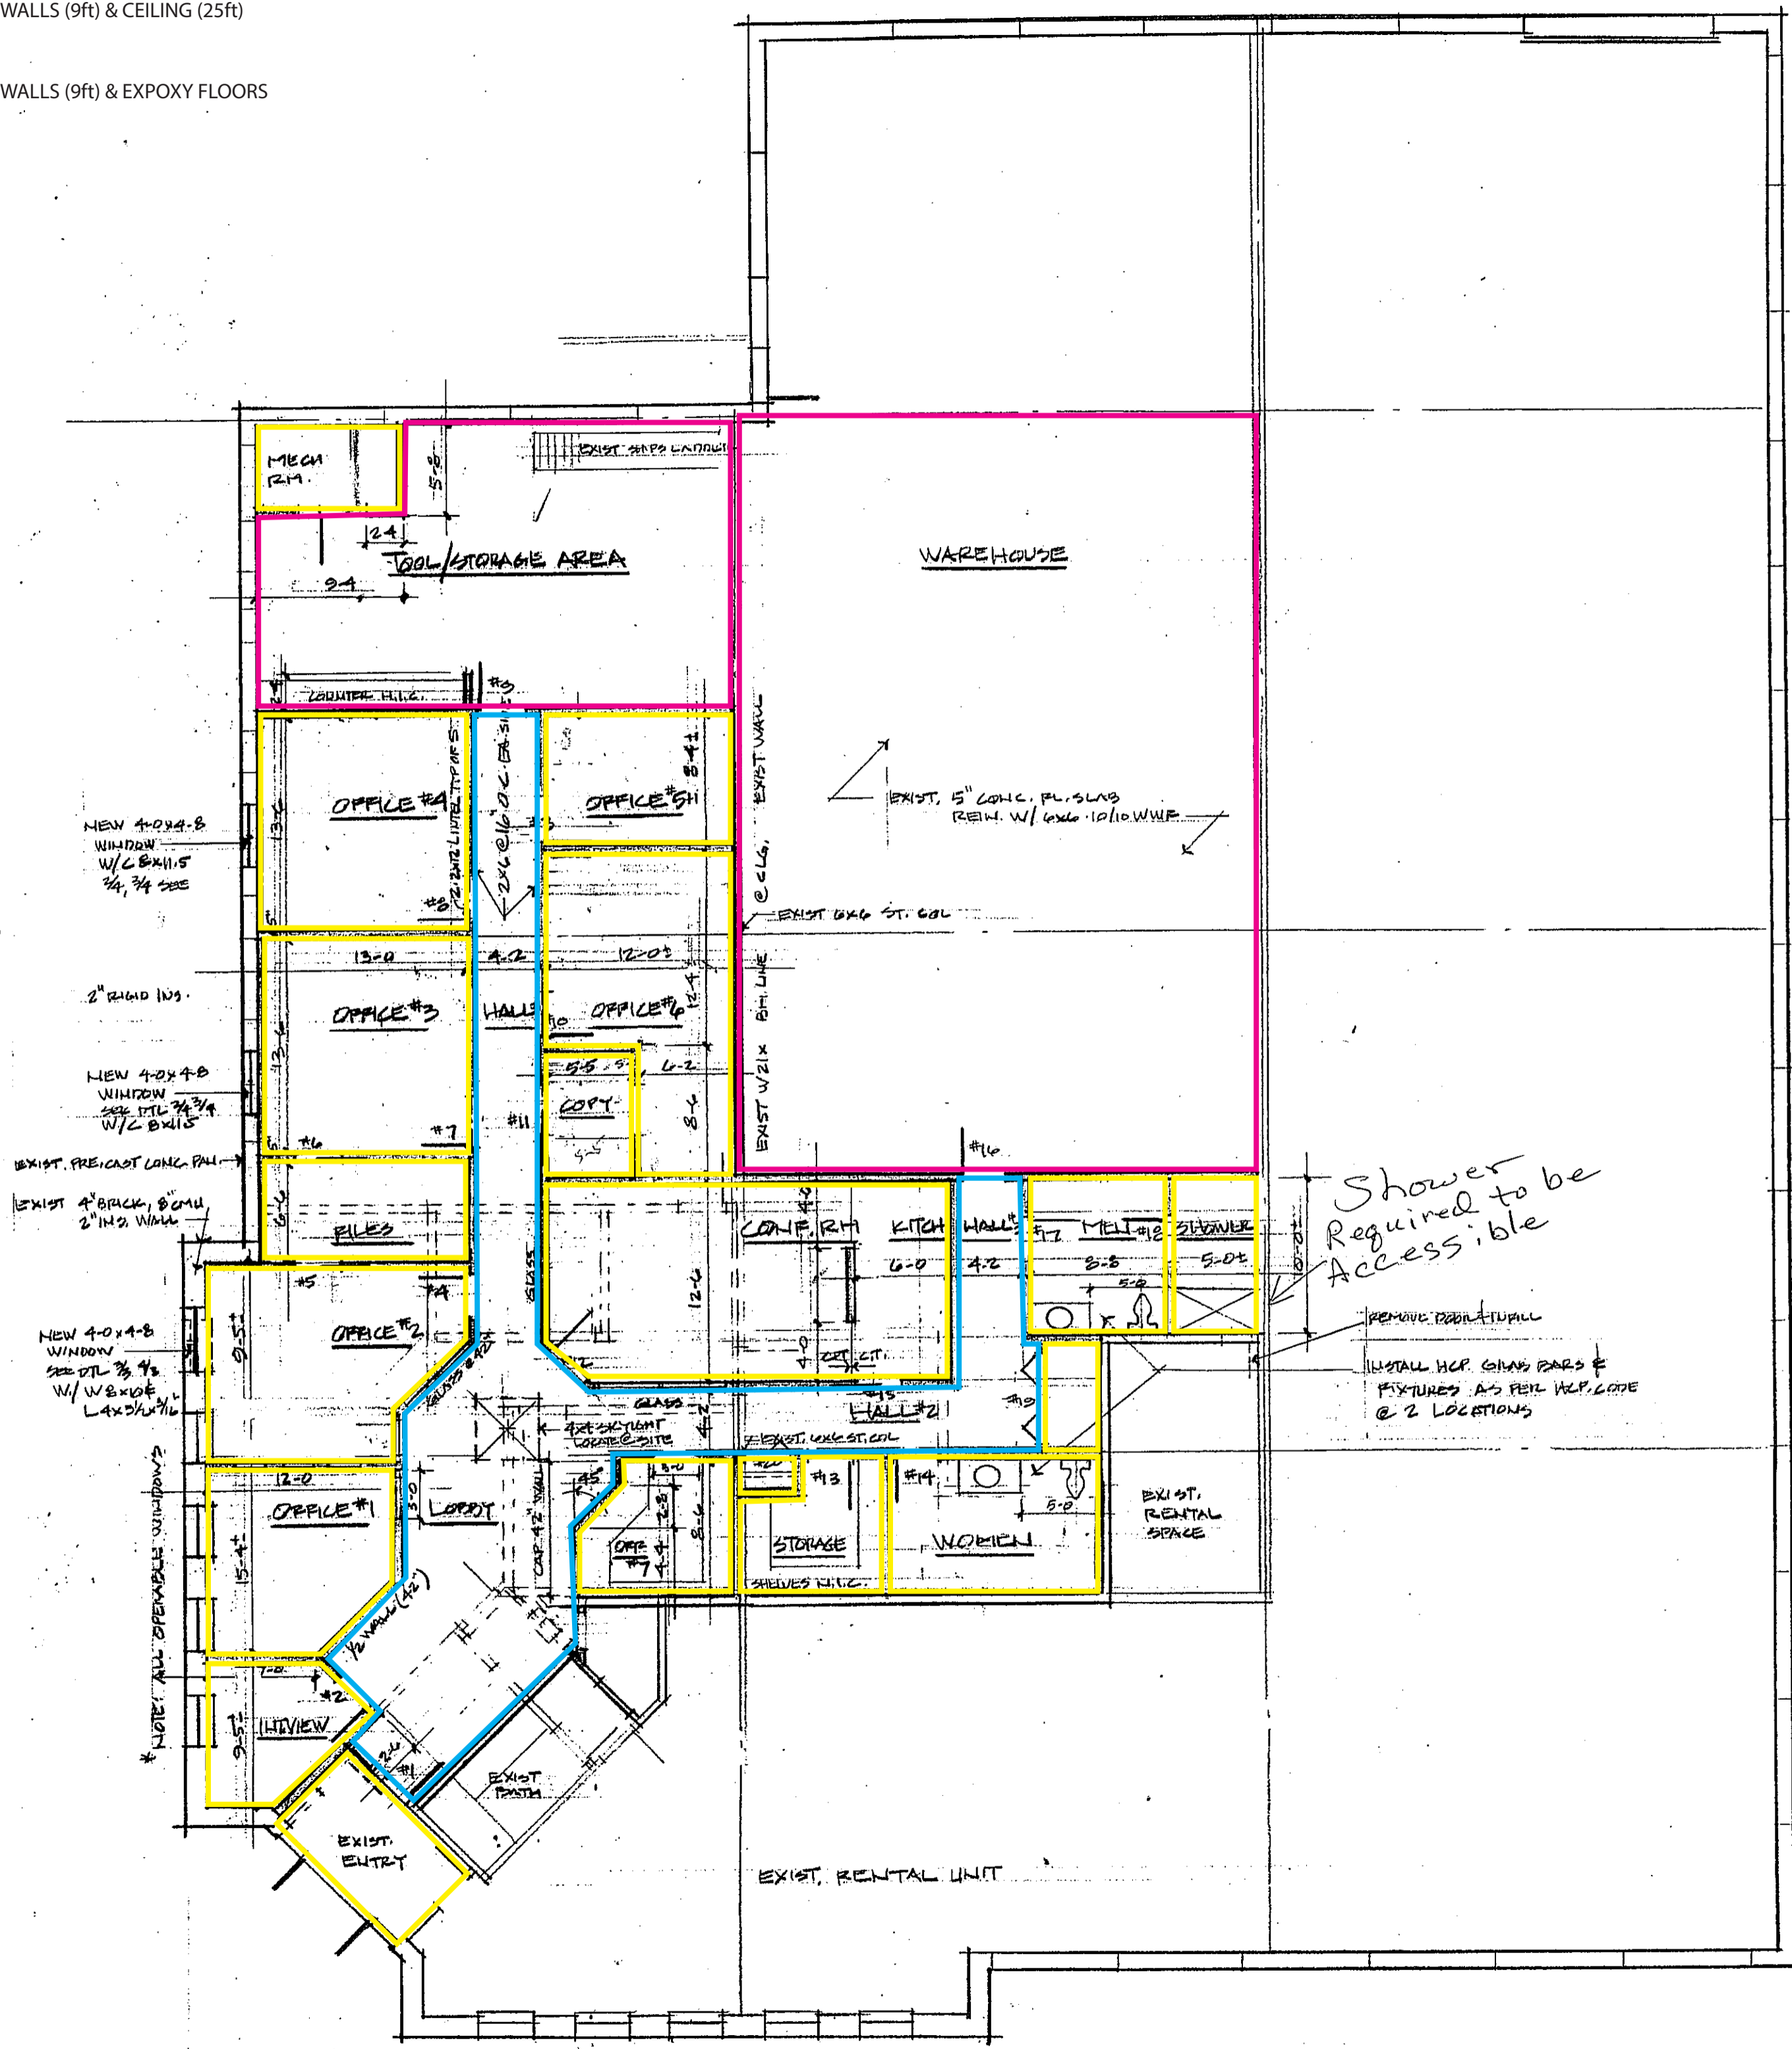

ROOM FINISH SCHEDULE

AREA	FLOOR	WALLS	EAST	SOUTH	WEST	CEILING	CASE W/	CAV
LOBBY	OPT/WH	OPT/WH	PNT/WH	PNT/WH	PNT/WH	PNT/WH	WD. VAR	CAV
INTERVIEW	"	"	PNT	PNT	PNT	PNT	GOOD 10'	CAV
OFFICE #1	"	"	"	"	"	"	GOOD 10'	CAV
OFFICE #2	"	"	"	"	"	"	GOOD 10'	CAV
FILES	"	"	"	"	"	"	"	CAV
OFFICE #3	"	"	"	"	"	"	"	CAV
OFFICE #4	"	"	"	"	"	"	"	CAV
TOOL/STOR.	CONC.	"	"	"	"	"	OPEN	"
OFFICE #5	OPT/WH	"	"	"	"	"	GOOD 10'	CAV
OFFICE #6	"	"	"	"	"	"	"	CAV
CONF. RM	"	"	"	"	"	"	"	CAV
HALL #1	"	"	"	"	"	"	"	CAV
KITCH. RM.	"	"	"	"	"	"	"	CAV
KITCHEN	CT	"	PNT	PNT	PNT	PNT	WD. VAR. CABIN	"
HALL #2	OPT/WH	"	"	"	"	"	OPEN	"
MELT	CT	CT	PNT/CT	PNT/CT	PNT/CT	PNT/CT	GYP. PNT/CT	CT/SHOWER
SHOWER	CT	CT	"	"	"	"	GYP. PNT/CT	CT/SHOWER
WOMEN	CT	CT	"	"	"	"	GYP. PNT/CT	"
STORAGE	OPT/WH	OPT	PNT	PNT	PNT	PNT	"	10'
OFFICE #7	"	OPT	"	"	"	"	OPEN	"
HALL #2	"	OPT	PNT/WH	PNT/WH	PNT/WH	PNT/WH	OPEN	"

DOOR SCHEDULE - * ALL WD DOORS - MAPLE W/2 PANELS

NO.	SIZE	MAT.	FRAME	TYPE	FIN.
1	3'x6'	ALUM.	AL	SWG.	ANOD. + SIDELIGHT (2'x6')
2	3'x6'	WD/CL	HM	SWG.	VAR.
3	3'x6'	WD/CL	HM	SWG.	VAR.
4	3'x6'	WD/CL	HM	SWG.	VAR.
5	3'x6'	WD	HM	PREC.	VAR.
6	3'x6'	WD	HM	PREC.	VAR.
7	3'x6'	WD/CL	HM	SWG.	VAR.
8	3'x6'	WD/CL	HM	SWG.	VAR.
9	3'x6'	WD	HM	SWG.	PNT.
10	3'x6'	WD/CL	HM	SWG.	VAR.
11	3'x6'	WD	HM	PREC.	VAR.
12	3'x6'	WD/CL	HM	SWG.	VAR.
13	3'x6'	WD	HM	SWG.	VAR.
14	3'x6'	WD	HM	SWG.	VAR.
15	3'x6'	WD	HM	PREC.	VAR.
16	3'x6'	HM	HM	SWG.	PNT.
17	3'x6'	HM	HM	SWG.	PNT.
18	3'x6'	HM	HM	SWG.	PNT.
19	3'x6'	WD	HM	PREC.	VAR.
20	3'x6'	WD	HM	PREC.	VAR.
21	3'x6'	HM	HM	SWG.	PNT.